



650V/7A N-Channel Advanced Power MOSFET

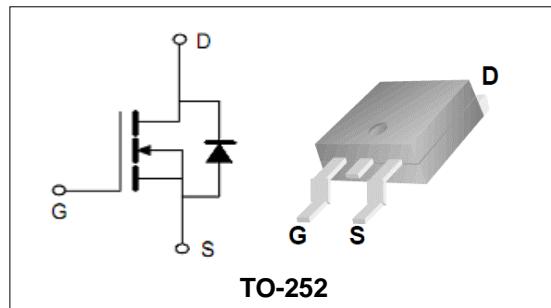
Features

- Improved dv/dt Capability, High Ruggedness.
- Maximum Junction Temperature Range (150°C)
- 100% Avalanche Tested

BVDSS	650	V
ID	7	A
RDSON@VGS=10V	1.1	Ω

Applications

- Power factor correction (PFC)
- Switched mode power supplies(SMPS)
- Uninterruptible Power Supply (UPS)



Order Information

Product	Package	Marking	Reel Size	Reel	Carton
PTD7N65	TO-252	PTD7N65	13inch	2500PCS	50000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	650	V
V_{GS}	Gate-Source Voltage	± 30	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
I_S	Diode Continuous Forward Current	TC =25°C 7	A

Mounted on Large Heat Sink

E_{AS}	Single Pulse Avalanche Energy (Note1)	385	mJ
I_{DM}	Pulse Drain Current Tested (Silicon Limit) (Note2)	TC =25°C 28	A
I_D	Continuous Drain current	TC =25°C 7	A
P_D	Maximum Power Dissipation	TC =25°C 90	W
$R_{\theta JC}$	Thermal Resistance Junction-to-Case (Note3)	1.39	°C/W



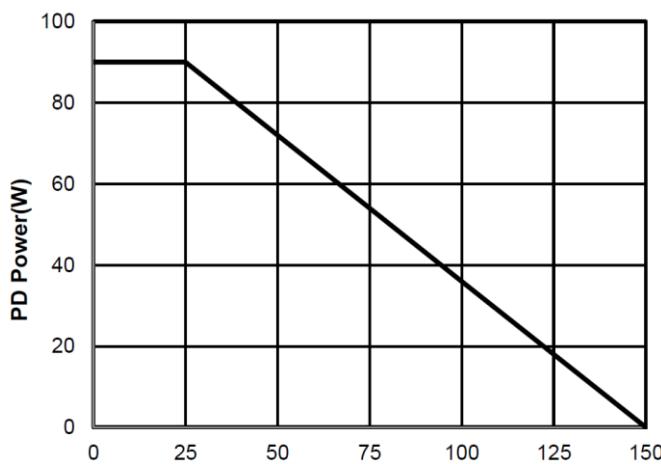
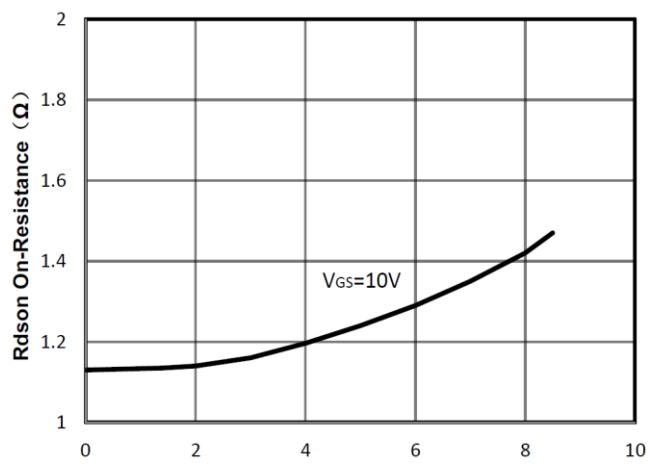
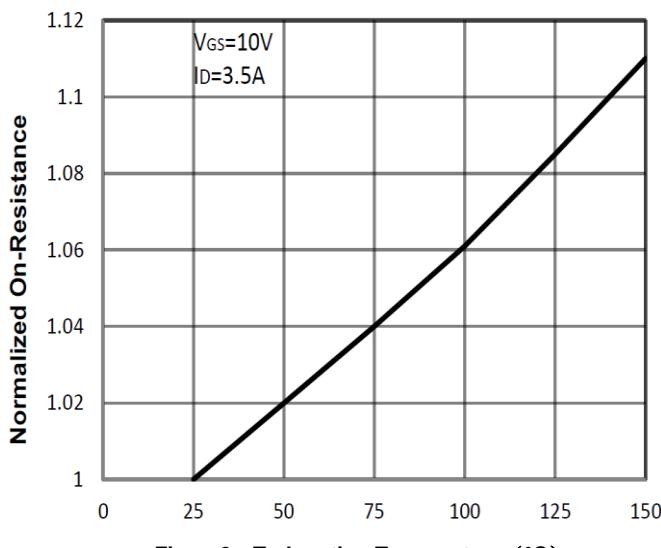
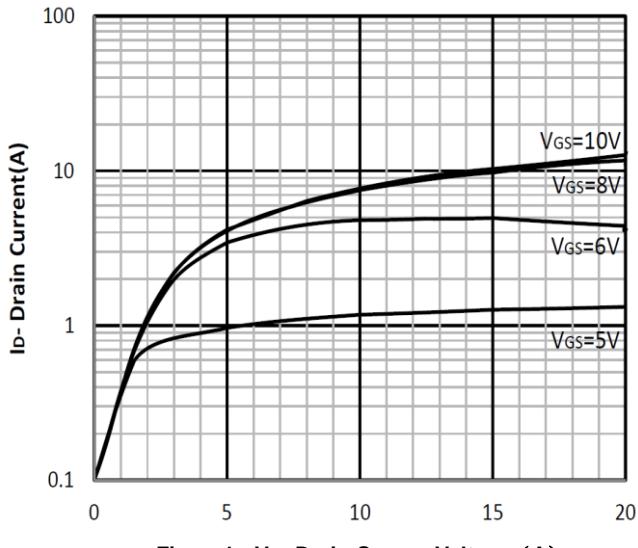
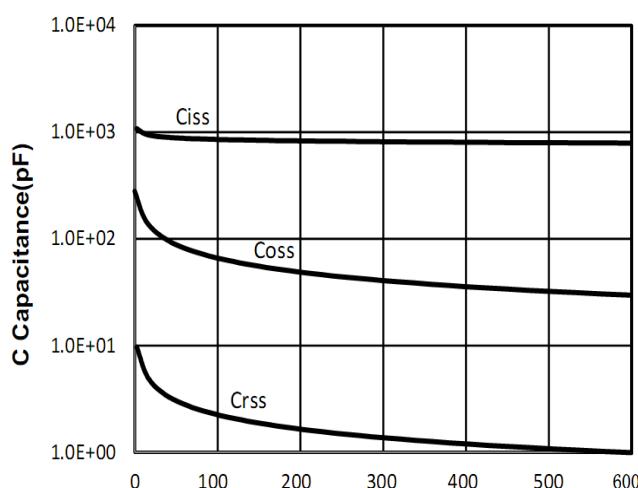
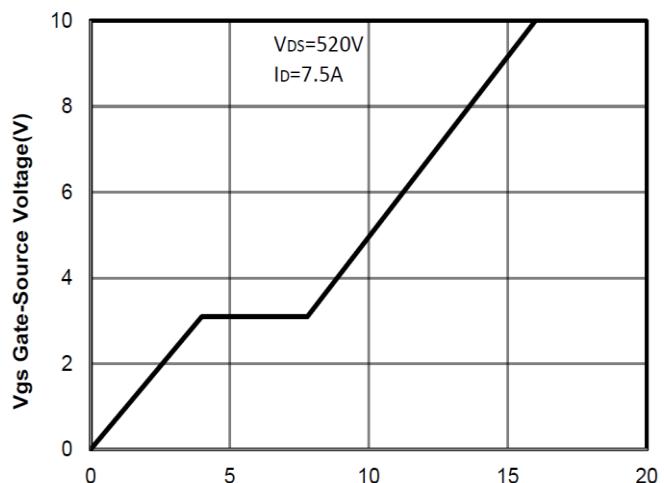
650V/7A N-Channel Advanced Power MOSFET

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
$V_{(BR)DSS}$	Drain- Source Breakdown Voltage	$VGS=0V$ $ID=250\mu A$	650	--	--	V
I_{DSS}	Zero Gate Voltage Drain current	$VDS=650V, VGS=0V$	--	--	1	μA
I_{GSS}	Gate-Body Leakage Current	$VGS=\pm 30V, VDS=0V$	--	--	± 100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$VDS=VGS, ID=250\mu A$	2	3	4	V
$R_{DS(ON)}$	Drain-Source On-State Resistance (Note4)	$VGS=10V, ID=3.5A$	--	1.1	1.3	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated) (Note5)						
C_{iss}	Input Capacitance	$VDS=25V,$ $VGS=0V,$ $F=1MHz$	--	930	--	pF
C_{oss}	Output Capacitance		--	100	--	pF
C_{rss}	Reverse Transfer Capacitance		--	4.5	--	pF
Q_g	Total Gate Charge	$VDS=520V,$ $ID=7A,$ $VGS=10V$	--	16	--	nC
Q_{gs}	Gate-Source Charge		--	4	--	nC
Q_{gd}	Gate-Drain Charge		--	3.6	--	nC
Switching Characteristics (Note5)						
$t_{d(on)}$	Turn-on Delay Time	$VDS=300V,$ $ID=7A,$ $RG=25\Omega,$ $VGS=10V$	--	26	--	nS
t_r	Turn-on Rise Time		--	17	--	nS
$t_{d(off)}$	Turn-off Delay Time		--	57	--	nS
t_f	Turn-off Fall Time		--	23	--	nS
Source- Drain Diode Characteristics@ TJ = 25°C (unless otherwise stated)						
V_{SD}	Forward on voltage	$IS=5A, VGS=0V$	--	0.85	1.4	V

Note:

1. Limited by TJmax, starting TJ = 25° C, RG = 25Ω, VD = 50V, VGS = 10V. Part not recommended for use above this value.
2. Repetitive Rating: Pulse width limited by maximum junction temperature.
3. Surface Mounted on FR4 Board, $t \leq 10$ sec.
4. Pulse Test: pulse width ≤ 300 us, duty cycle $\leq 2\%$.
5. Guaranteed by design, not subject to production testing.

Typical Characteristics

650V/7A N-Channel Advanced Power MOSFET

Figure1: TJ Junction Temperature (°C)

Figure2: Id Drain Current (A)

Figure3: TJ Junction Temperature (°C)

Figure4: Vds Drain-Source Voltage (A)

Figure5: Vds Drain-Source Voltage (V)

Figure6: Qg Gate Charge (nC)

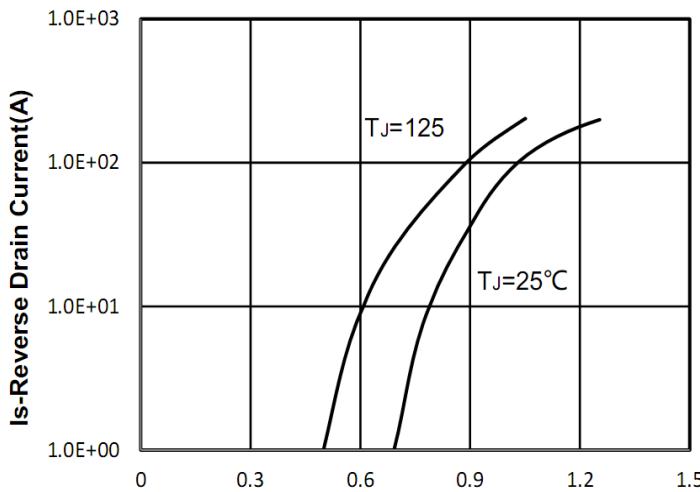
650V/7A N-Channel Advanced Power MOSFET


Figure7: V_{sd} Source-Drain Voltage (V)

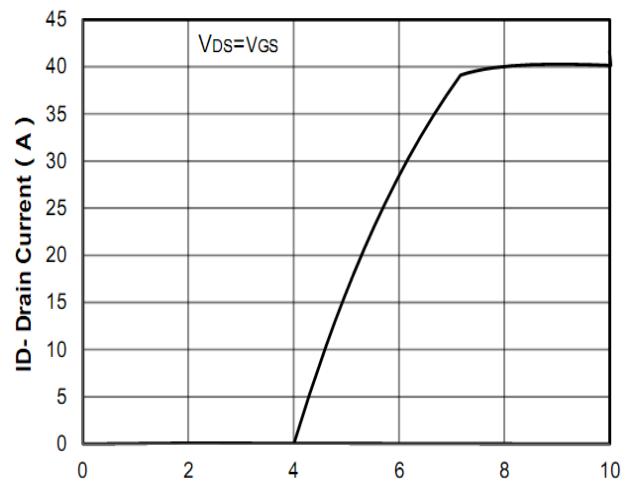


Figure8: V_{gs} Gate-Source Voltage (V)

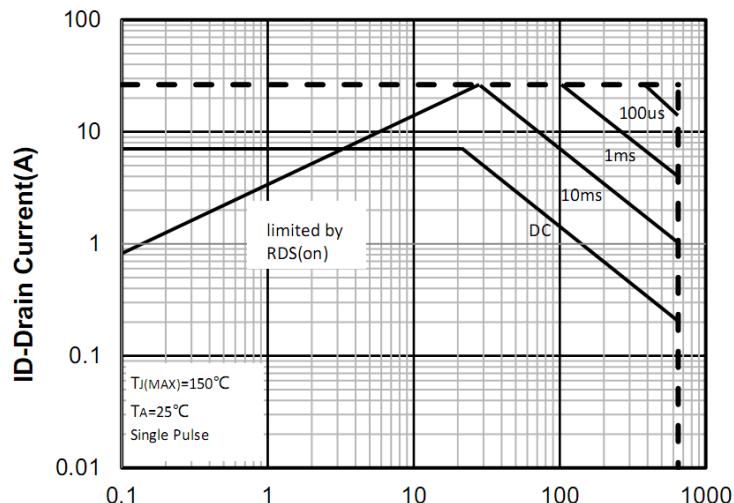


Figure9: V_{ds} Drain -Source Voltage (V)

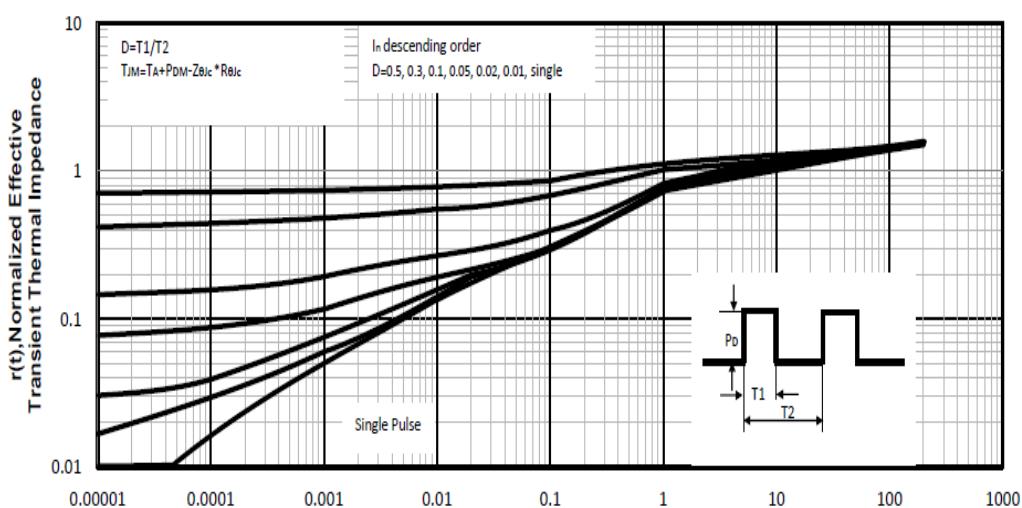
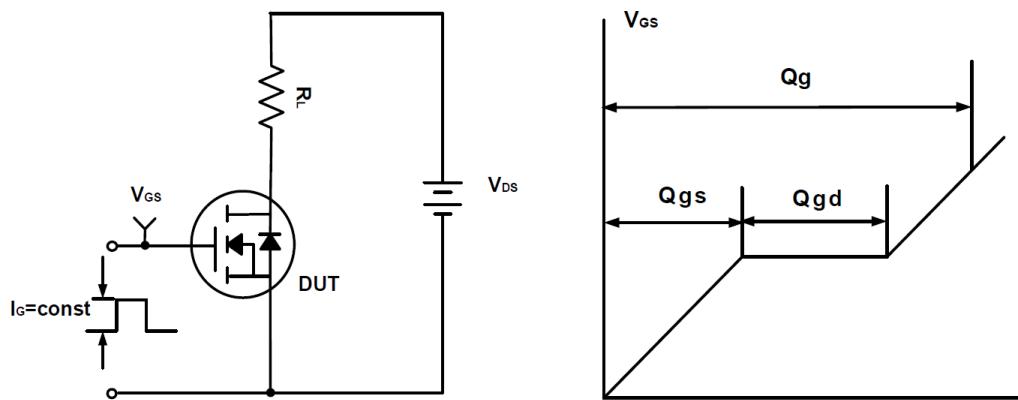
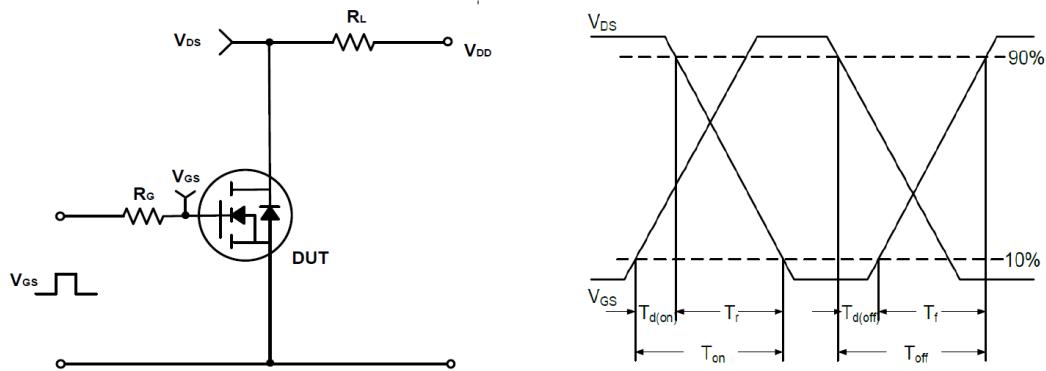
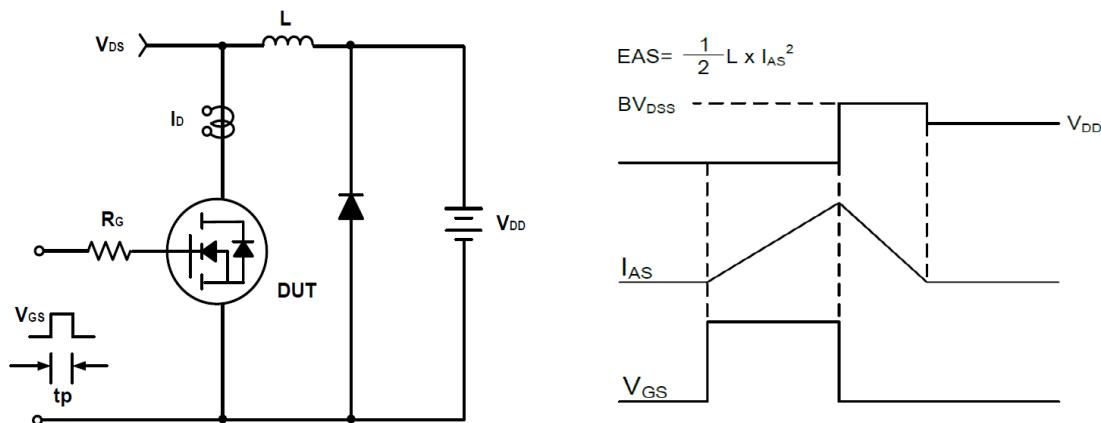
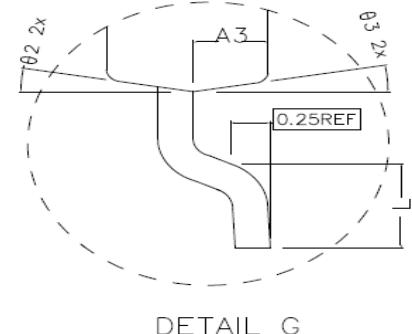
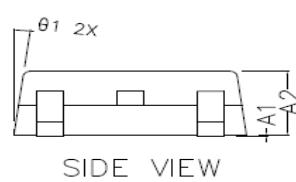

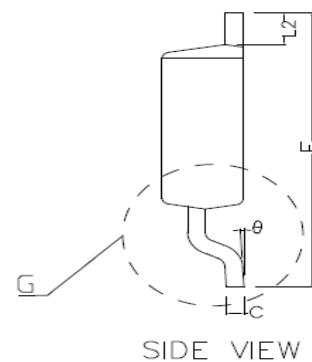
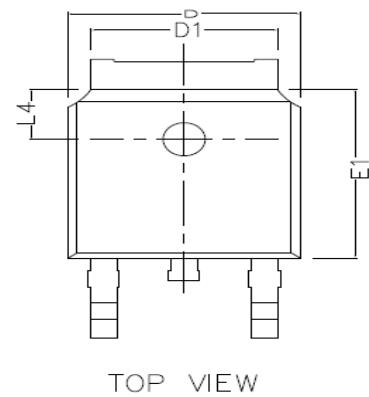
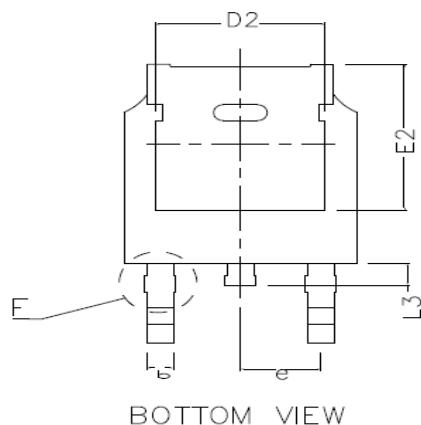


Figure10: Square Wave Pulse Duration (sec)

650V/7A N-Channel Advanced Power MOSFET
Test Circuit and Waveform:

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

Figure C Unclamped Inductive Switching Circuit & Waveforms

650V/7A N-Channel Advanced Power MOSFET
TO-252 Package Outline Dimensions (Units: mm)


COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A ₁	0.000	0.100	0.150
A ₂	2.200	2.300	2.400
A ₃	1.020	1.070	1.120
b	0.710	0.760	0.810
c	0.460	0.508	0.550
D	6.500	6.600	6.700
D ₁	5.330REF		
D ₂	4.830REF		
E	9.900	10.100	10.300
E ₁	6.000	6.100	6.200
E ₂	5.600REF		
e	2.286TYPE		
L	1.400	1.550	1.700
L ₂	1.10REF		
L ₃	0.80REF		
L ₄	1.80REF		
θ	0~8°		
θ ₁	7° TYPE		
θ ₂	10° TYPE		
θ ₃	10° TYPE		