



## -30V/-7A P-Channel Enhancement Mode Power MOSFET


### Features

- Trench Power LV MOSFET technology
- High density cell design for Low RDS(ON)
- High Speed switching

BVDSS	-30	V
ID	-7	A
RDSON@VGS=-4.5V	18	mΩ
RDSON@VGS=-2.5V	22	mΩ

### Applications

- Battery protection
- Load switch
- Power management

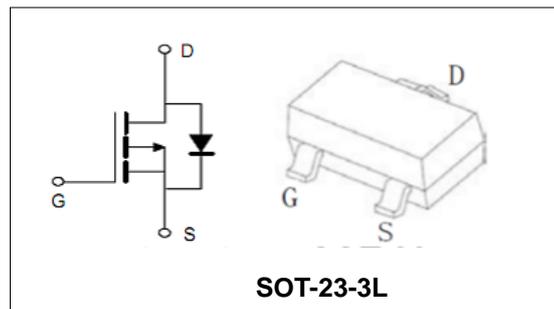

### Order Information

Product	Package	Marking	Reel Size	Reel	Carton
PTL3107	SOT-23-3L	3117	7inch	3000PCS	180000PCS

### Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
<b>Common Ratings (TC=25°C Unless Otherwise Noted)</b>			
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	-30	V
$V_{GS}$	Gate-Source Voltage	±20	V
$T_J$	Maximum Junction Temperature	150	°C
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$I_S$	Diode Continuous Forward Current	$T_A = 25^\circ C$ -7	A
<b>Mounted on Large Heat Sink</b>			
$I_{DM}$	Pulse Drain Current Tested (Silicon Limit) (Note1)	$T_A = 25^\circ C$ -28	A
$I_D$	Continuous Drain current	$T_A = 25^\circ C$ -7	A
$P_D$	Maximum Power Dissipation	$T_A = 25^\circ C$ 1.9	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient (Note2)	65.7	°C/W

**-30V/-7A P-Channel Enhancement Mode Power MOSFET**

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
<b>Static Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise stated)</b>						
V <sub>(BR)DSS</sub>	Drain- Source Breakdown Voltage	VGS=0V ID=-250μA	-30	--	--	V
I <sub>DSS</sub>	Zero Gate Voltage Drain current	VDS=-30V,VGS=0V	--	--	-1	μA
I <sub>GSS</sub>	Gate-Body Leakage Current	VGS=±20V,VDS=0V	--	--	±100	nA
V <sub>GS(TH)</sub>	Gate Threshold Voltage	VDS=VGS,ID=-250μA	-1	-1.5	-2.5	V
R <sub>DS(ON)</sub>	Drain-Source On-State Resistance (Note3)	VGS=-10V, ID=-7A	--	18	25	mΩ
		VGS=-4.5V, ID=-5A	--	22	36	mΩ
<b>Dynamic Electrical Characteristics @ T<sub>J</sub> = 25°C (unless otherwise stated) (Note4)</b>						
C <sub>iss</sub>	Input Capacitance	VDS= -15V, VGS=0V, F=1MHz	--	1500	--	pF
C <sub>oss</sub>	Output Capacitance		--	327	--	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		--	276	--	pF
Q <sub>g</sub>	Total Gate Charge	VDS= -15V, ID= -7A, VGS= -10V	--	130	--	nC
Q <sub>gs</sub>	Gate-Source Charge		--	5.3	--	nC
Q <sub>gd</sub>	Gate-Drain Charge		--	7.6	--	nC
<b>Switching Characteristics (Note4)</b>						
t <sub>d(on)</sub>	Turn-on Delay Time	VDD=-15V, ID=-4.2A, RG=2.5Ω, VGS=-10V	--	14	--	nS
t <sub>r</sub>	Turn-on Rise Time		--	20	--	nS
t <sub>d(off)</sub>	Turn-off Delay Time		--	95	--	nS
t <sub>f</sub>	Turn-off Fall Time		--	65	--	nS
<b>Source- Drain Diode Characteristics @ T<sub>J</sub> = 25°C (unless otherwise stated)</b>						
V <sub>SD</sub>	Forward on voltage (Note3)	IS=-3.5A,VGS=0V	--	--	-1.2	V

Note:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec
3. Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
4. Guaranteed by design, not subject to production testing.



-30V/-7A P-Channel Enhancement Mode Power MOSFET

Typical Characteristics

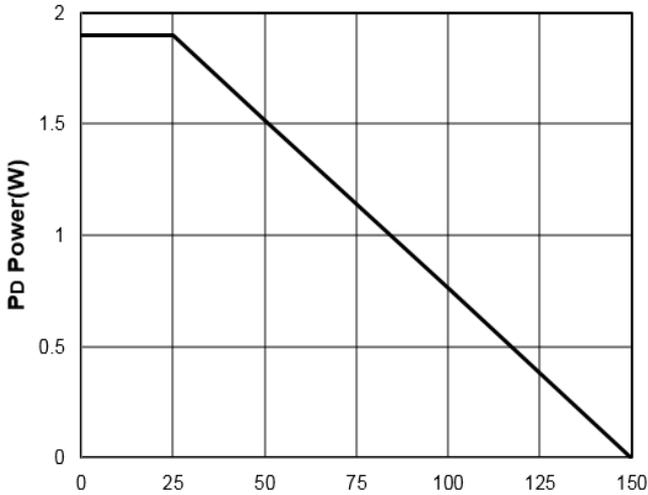


Figure1: T<sub>j</sub> Junction Temperature (°C)

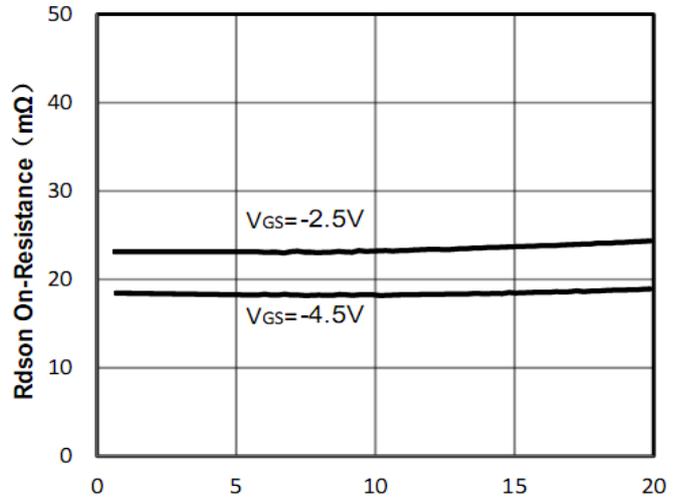


Figure2: -I<sub>d</sub> Drain Current (A)

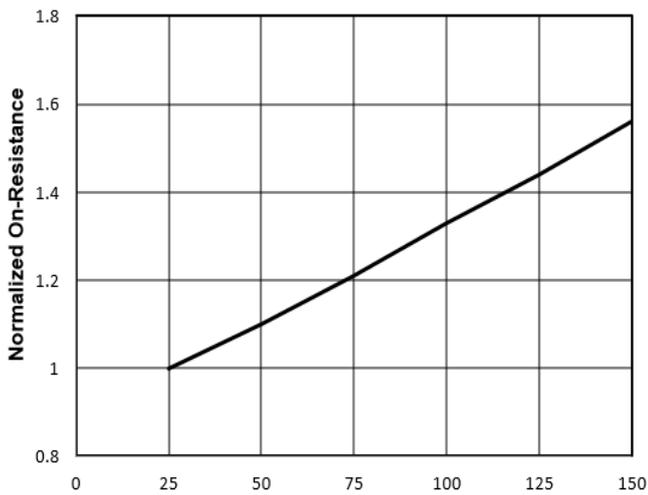


Figure3: T<sub>j</sub> Junction Temperature (°C)

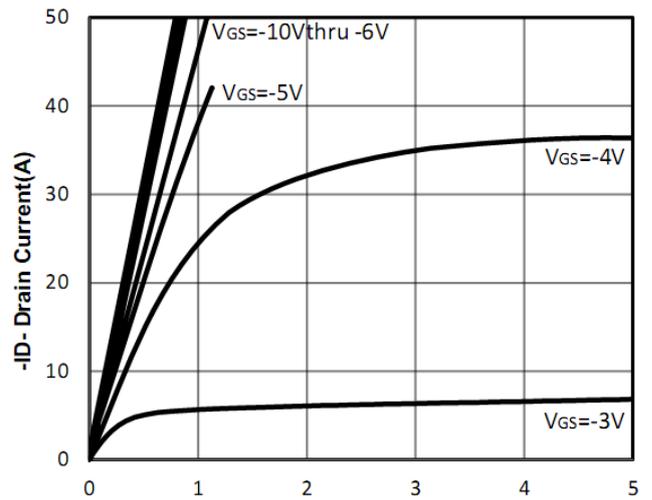


Figure4: -V<sub>ds</sub> Drain-Source Voltage (V)

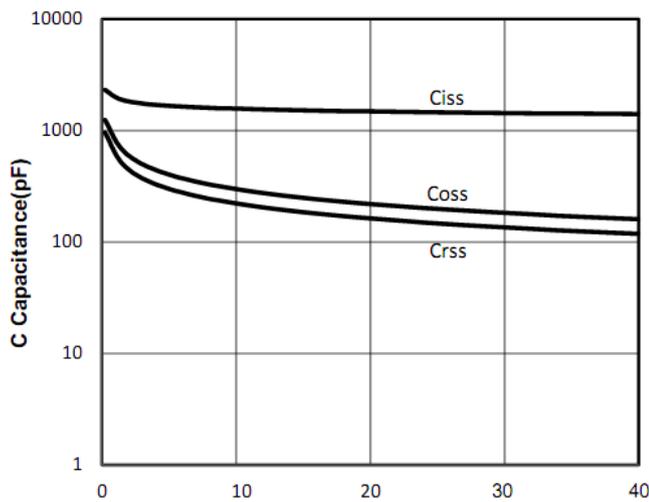


Figure5: -V<sub>ds</sub> Drain-Source Voltage (V)

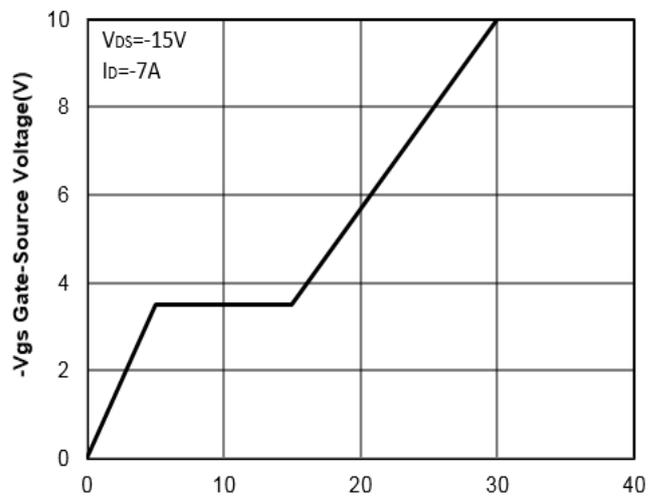


Figure6: Q<sub>g</sub> Gate Charge (nC)



-30V/-7A P-Channel Enhancement Mode Power MOSFET

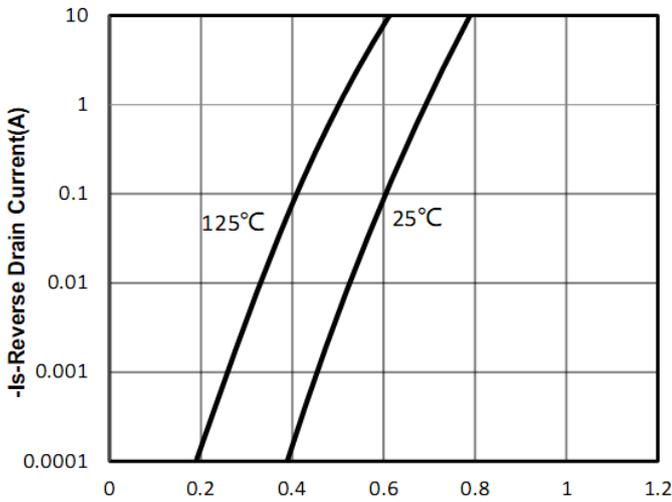


Figure7: -Vsd Source-Drain Voltage (V)

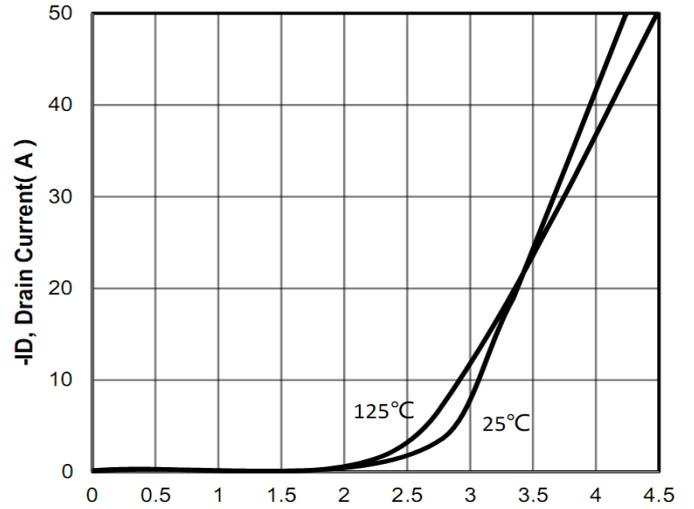


Figure8: -Vgs Gate-Source Voltage (V)

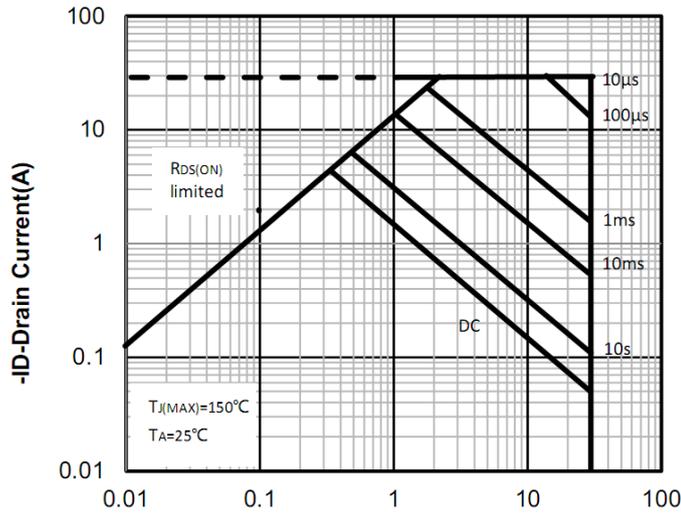


Figure9: -Vds Drain -Source Voltage (V)

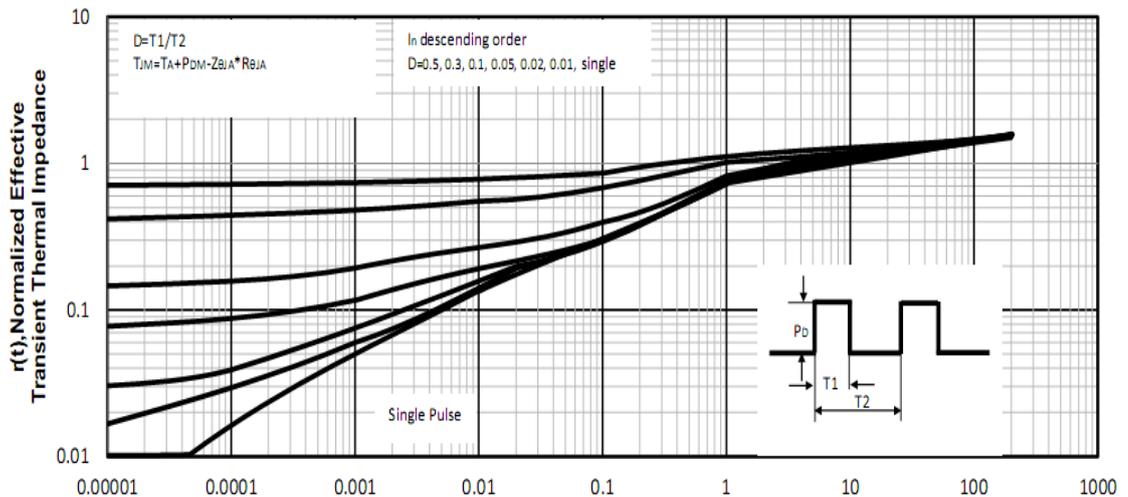


Figure10: Square Wave Pulse Duration (sec)

-30V/-7A P-Channel Enhancement Mode Power MOSFET

Test Circuit and Waveform:

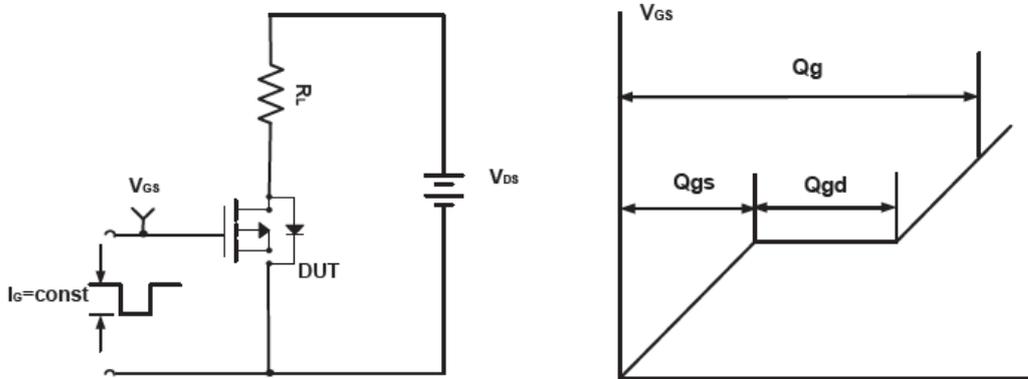


Figure A Gate Charge Test Circuit & Waveforms

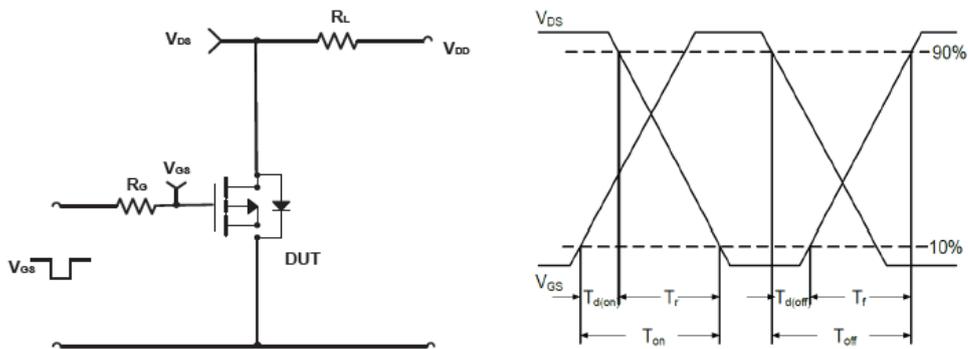


Figure B Switching Test Circuit & Waveforms

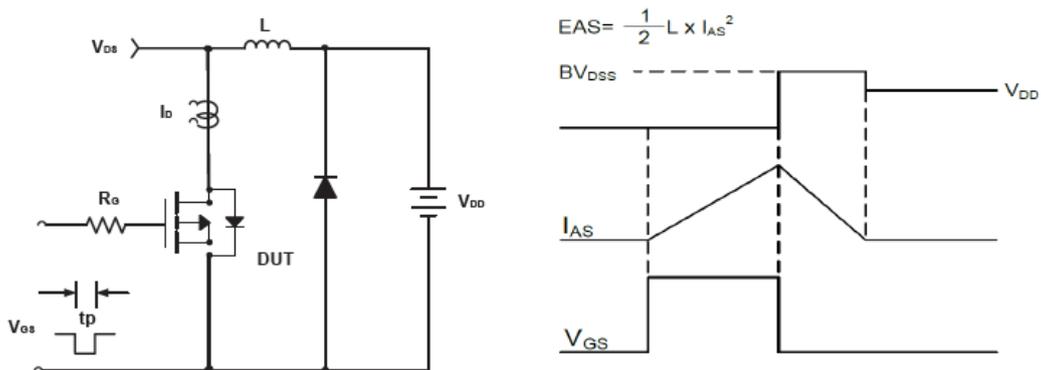
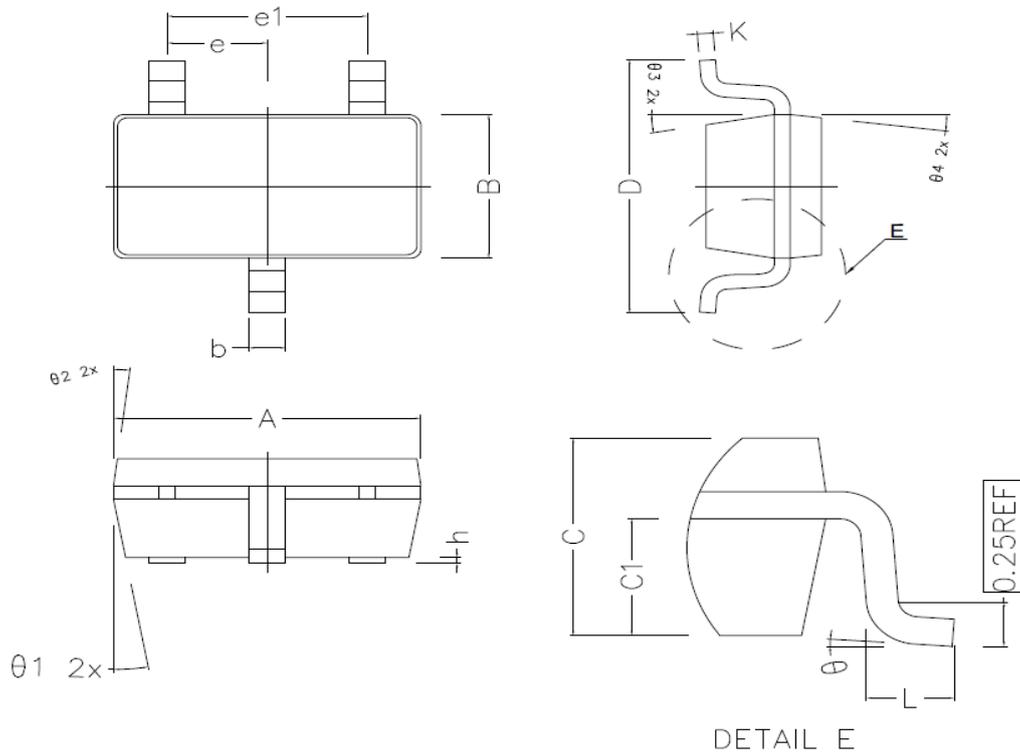


Figure C Unclamped Inductive Switching Circuit & Waveforms

**-30V/-7A P-Channel Enhancement Mode Power MOSFET**
**SOT-23-3L Package Outline Dimensions (Units: mm)**


COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A	2.820	2.920	3.020
B	1.500	1.600	1.700
C	1.050	1.100	1.150
C1	0.600	0.650	0.700
D	2.650	2.800	2.950
L	0.300	0.450	0.600
b	0.280	0.350	0.420
h	0.020	0.050	0.100
K	0.120	—	0.230
e	0.950TYPE		
e1	1.900TYPE		
$\theta_1$	10° TYPE		
$\theta_2$	7° TYPE		
$\theta_3$	10° TYPE		
$\theta_4$	7° TYPE		
$\theta$	0° ~ 8°		