



30V/90A N-Channel Advanced Power MOSFET

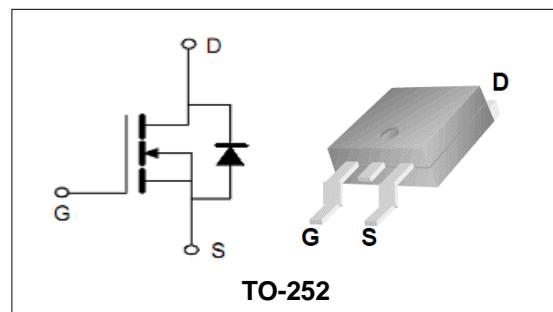
Features

- Low On-Resistance.
- Fast Switching
- 100% Avalanche Tested
- Repetitive Avalanche Allowed up to Tjmax

BVDSS	30	V
ID	90	A
RDSON@VGS=10V	3.1	mΩ
RDSON@VGS=4.5V	4.8	mΩ

Applications

- Load Switch
- PWM Application
- Power management

**Order Information**

Product	Package	Marking	Reel Size	Reel	Carton
PTD3090	TO-252	PTD3090	13inch	2500PCS	50000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit	
Common Ratings (TC=25°C Unless Otherwise Noted)				
V _{(BR)DSS}	Drain-Source Breakdown Voltage	30	V	
V _{GS}	Gate-Source Voltage	±20	V	
T _J	Maximum Junction Temperature	150	°C	
T _{STG}	Storage Temperature Range	-55 to 150	°C	
I _S	Diode Continuous Forward Current	TC =25°C	90	A
Mounted on Large Heat Sink				
E _{AS}	Single Pulse Avalanche Energy (Note1)	225	mJ	
I _{DM}	Pulse Drain Current Tested (Sillicon Limit) (Note2)	TC =25°C	360	A
I _D	Continuous Drain current	TC =25°C	90	A
P _D	Maximum Power Dissipation	TC =25°C	85	W
R _{θJC}	Thermal Resistance Junction-to-Case (Note3)		1.83 °C/W	



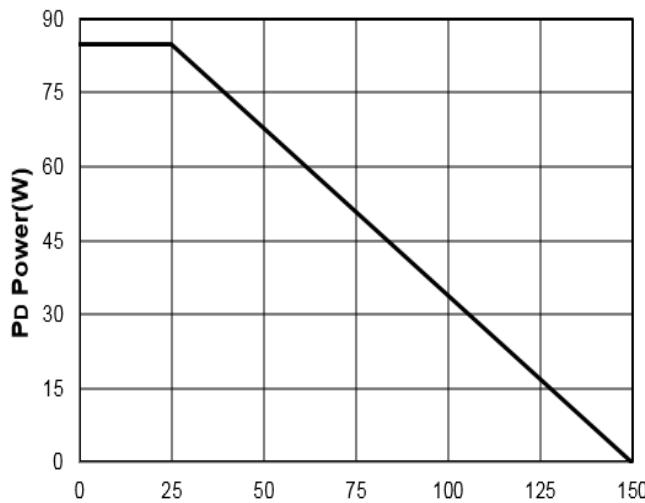
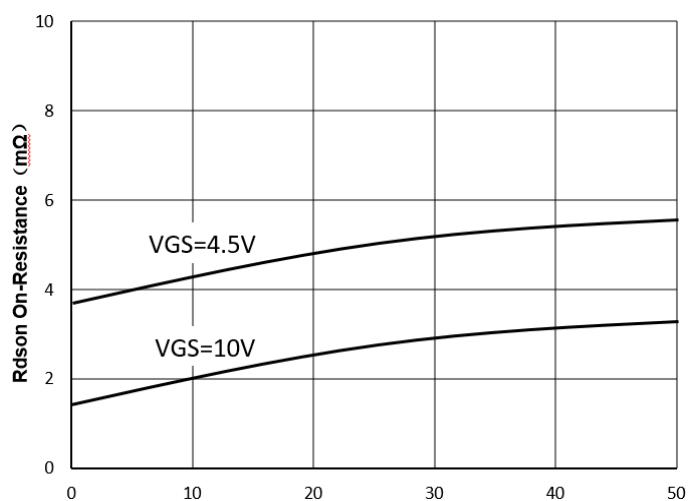
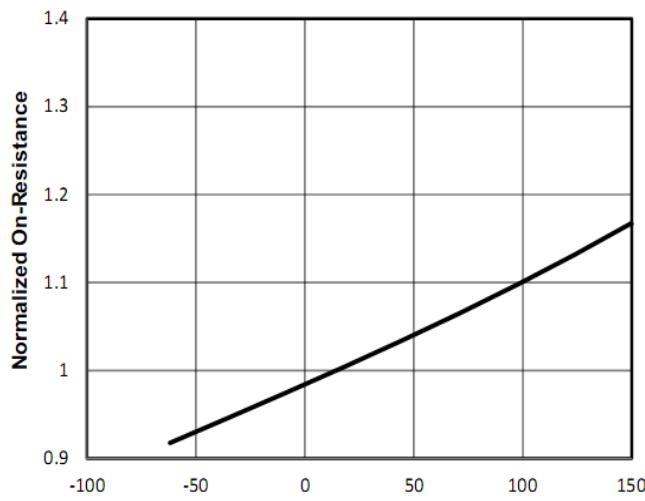
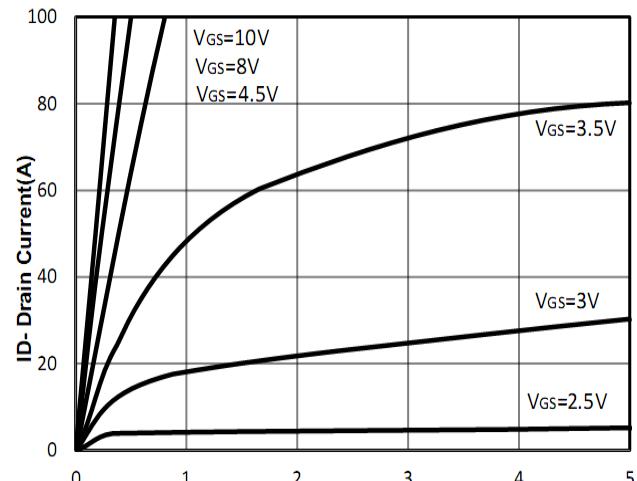
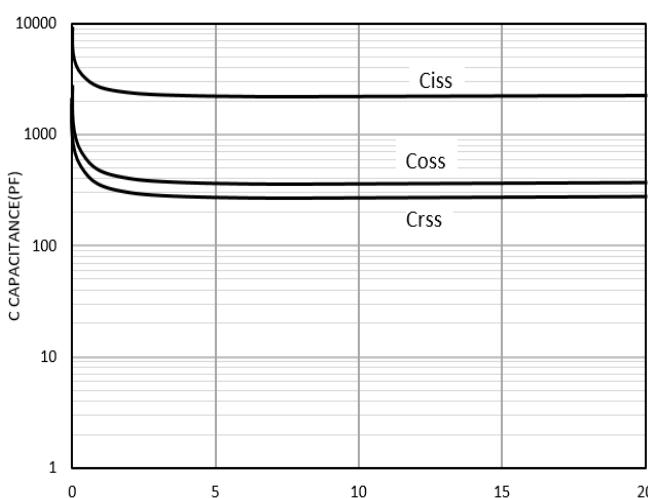
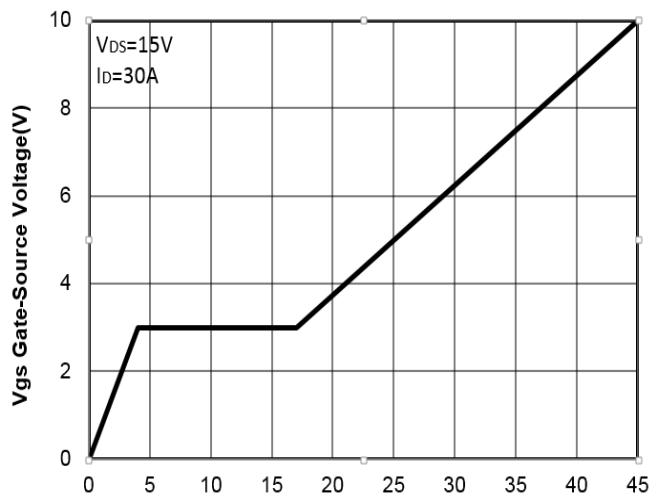
30V/90A N-Channel Advanced Power MOSFET

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
$V_{(BR)DSS}$	Drain- Source Breakdown Voltage	$VGS=0V$ $ID=250\mu A$	30	--	--	V
I_{DSS}	Zero Gate Voltage Drain current	$VDS=30V$, $VGS=0V$	--	--	1	μA
I_{GSS}	Gate-Body Leakage Current	$VGS=\pm 20V$, $VDS=0V$	--	--	± 100	nA
$V_{GS(TH)}$	Gate Threshold Voltage	$VDS=VGS$, $ID=250\mu A$	1.2	1.75	2.5	V
$R_{DS(ON)}$	Drain-Source On-State Resistance (Note4)	$VGS=10V$, $ID=40A$	--	3.1	3.6	$m\Omega$
		$VGS=4.5V$, $ID=20A$	--	4.8	7	$m\Omega$
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated) (Note5)						
C_{iss}	Input Capacitance	$VDS=15V$, $VGS=0V$, $F=1MHz$	--	2100	--	pF
C_{oss}	Output Capacitance		--	326	--	pF
C_{rss}	Reverse Transfer Capacitance		--	282	--	pF
Q_g	Total Gate Charge	$VDS=15V$, $ID=30A$, $VGS=10V$	--	45	--	nC
Q_{gs}	Gate-Source Charge		--	3	--	nC
Q_{gd}	Gate-Drain Charge		--	15	--	nC
Switching Characteristics (Note5)						
$t_{d(on)}$	Turn-on Delay Time	$VDS=15V$, $ID=30A$, $RG=3\Omega$, $VGS=10V$	--	21	--	nS
t_r	Turn-on Rise Time		--	32	--	nS
$t_{d(off)}$	Turn-off Delay Time		--	59	--	nS
t_f	Turn-off Fall Time		--	34	--	nS
Source- Drain Diode Characteristics@ TJ = 25°C (unless otherwise stated)						
V_{SD}	Forward on voltage	$IS=40A$, $VGS=0V$	--	--	1.2	V

Note:

1. Limited by TJmax, starting TJ = 25° C, RG = 25Ω, VD = 15V, VGS = 10V. Part not recommended for use above this value.
2. Repetitive Rating: Pulse width limited by maximum junction temperature.
3. Surface Mounted on FR4 Board, t ≤ 10 sec.
4. Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
5. Guranteed by design, not subject to production testing.

Typical Characteristics

30V/90A N-Channel Advanced Power MOSFET

Figure1: TJ Junction Temperature (°C)

Figure2: ID Drain Current (A)

Figure3: TJ Junction Temperature (°C)

Figure4: VDS Drain-Source Voltage (V)

Figure5: VDS Drain-Source Voltage (V)

Figure6: Qg Gate Charge (nC)

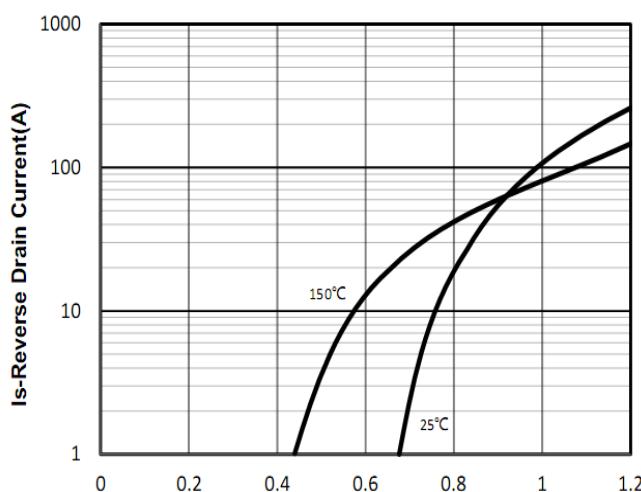
30V/90A N-Channel Advanced Power MOSFET


Figure 7: V_{sd} Source-Drain Voltage (V)

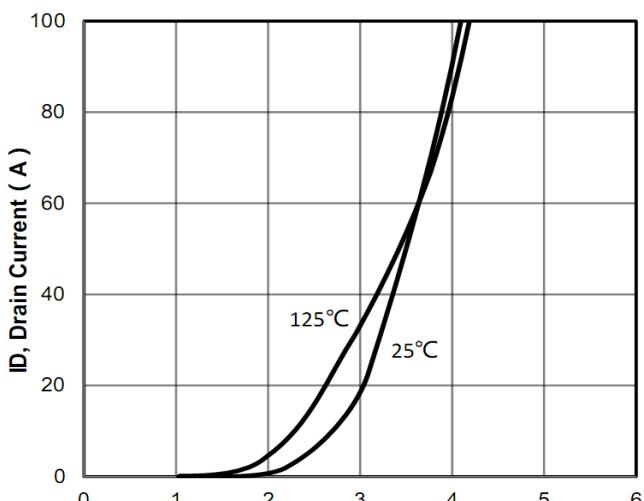


Figure 8: V_{gs} Gate-Source Voltage (V)

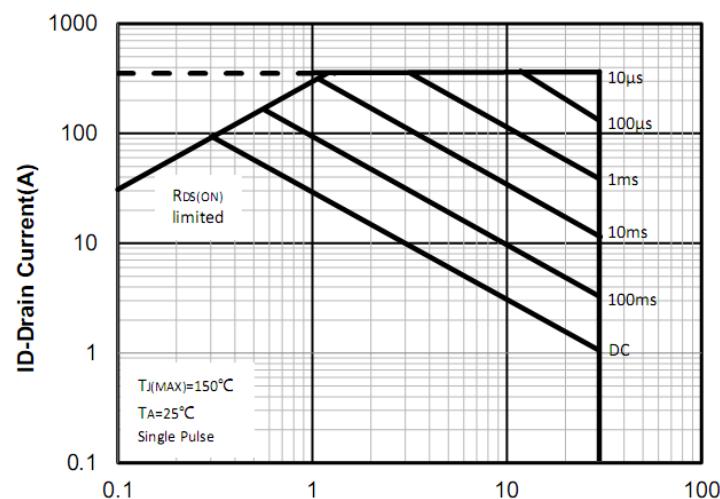


Figure 9: V_{ds} Drain -Source Voltage (V)

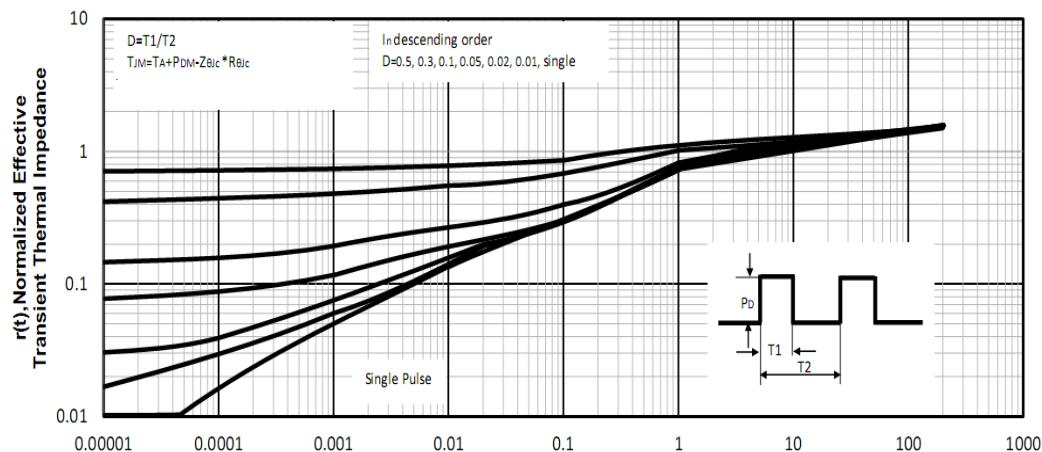
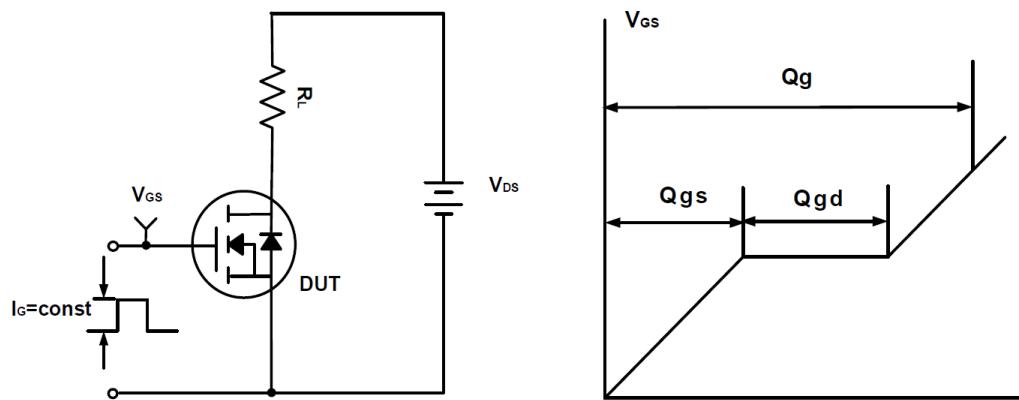
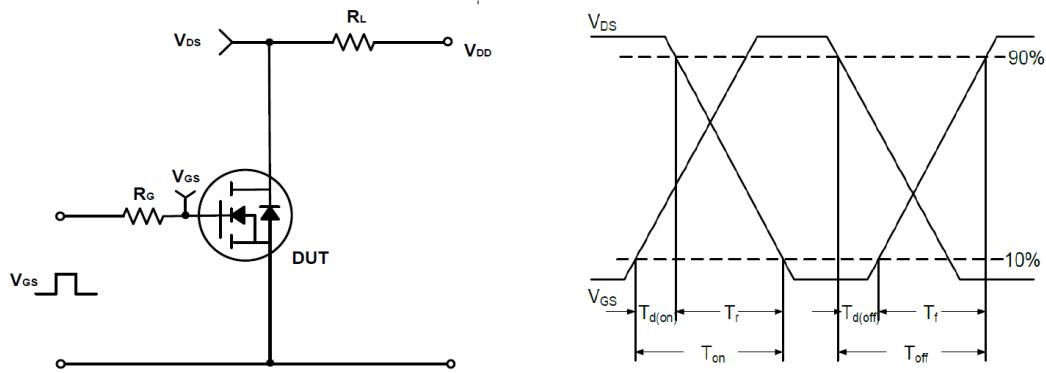
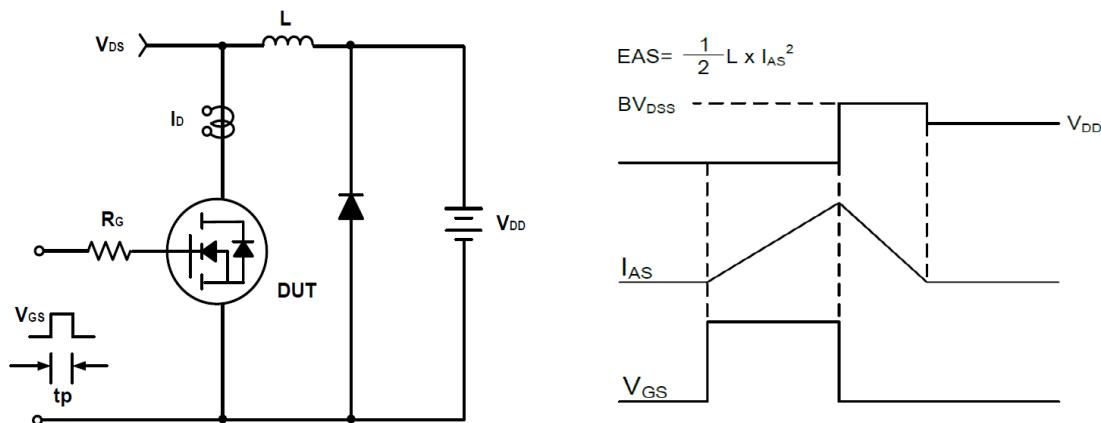
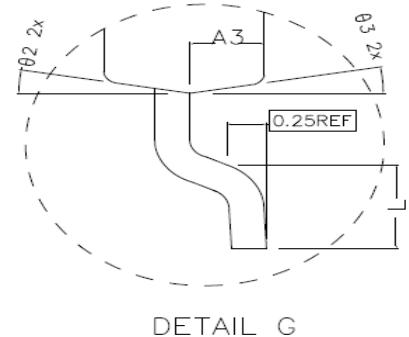


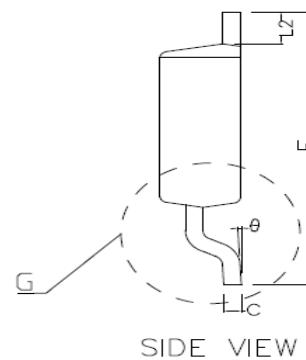
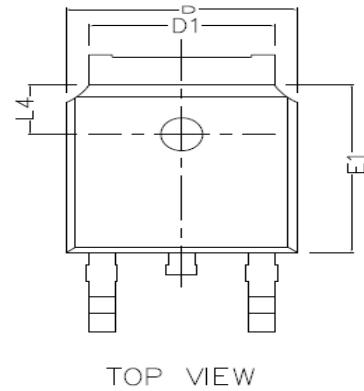
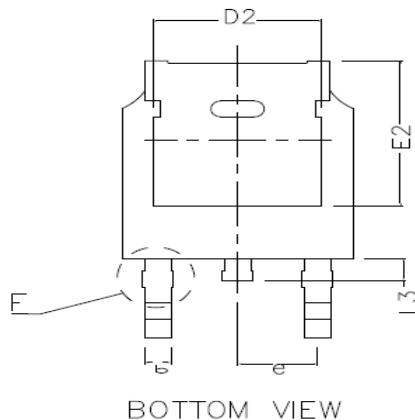


Figure 10: Square Wave Pulse Duration (sec)

30V/90A N-Channel Advanced Power MOSFET
Test Circuit and Waveform:

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

Figure C Unclamped Inductive Switching Circuit & Waveforms

30V/90A N-Channel Advanced Power MOSFET
TO-252 Package Outline Dimensions (Units: mm)


COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A1	0.000	0.100	0.150
A2	2.200	2.300	2.400
A3	1.020	1.070	1.120
b	0.710	0.760	0.810
c	0.460	0.508	0.550
D	6.500	6.600	6.700
D1	5.330REF		
D2	4.830REF		
E	9.900	10.100	10.300
E1	6.000	6.100	6.200
E2	5.600REF		
e	2.286TYPE		
L	1.400	1.550	1.700
L2	1.10REF		
L3	0.80REF		
L4	1.80REF		
θ	0~8°		
θ1	7° TYPE		
θ2	10° TYPE		
θ3	10° TYPE		